



- 1) All parts shall be laser-cut, drilled, machined, welded, or formed before galvanizing. Galvanized parts shall not be drilled or cut in any way that could damage the galvanized finish.
- 2) Hot-dip galvanized zinc finish shall be applied according to American Society for Testing and Materials (ASTM) standard A 123.
- 3) Steel tolerance shall be +.020 -.000
- 4) Standard light gauge galvanized steel framing.
- 5) 4" rib siding.

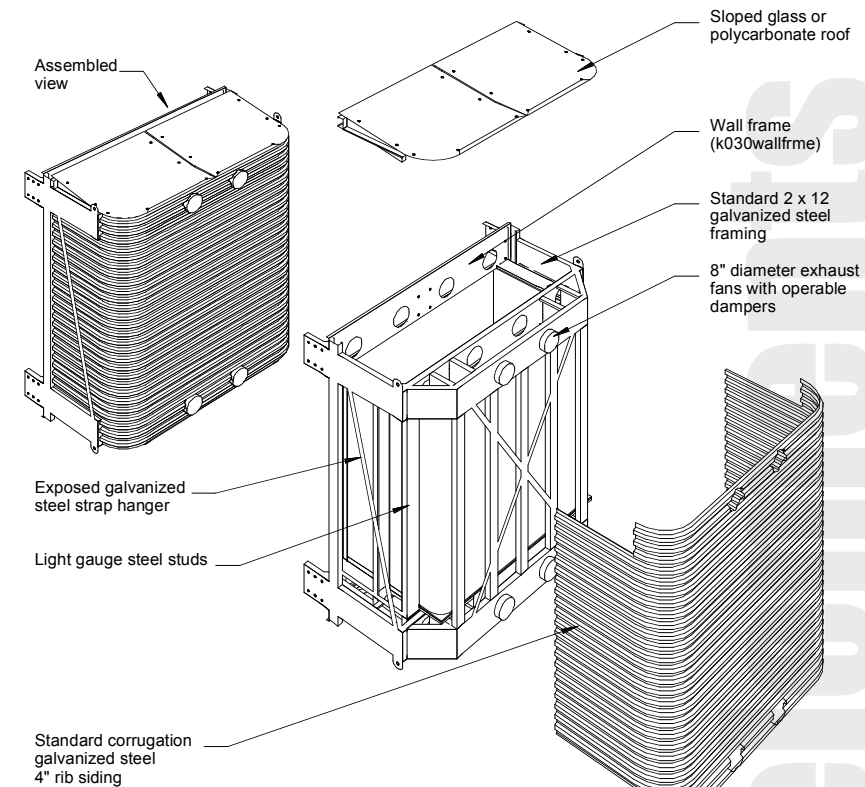

TOP

SECTION

SIDE



Plugin Creations
 www.plugin-creations.com
 3762 W 11th Ave #239, Eugene, Oregon 97402-3010 - info@plugin-creations.com
 REGISTERED ARCHITECT
 A. Scott P.
 EIR, Oregon
 4435
 PRELIMINARY
 OF OREGON

2005.01.10

UNITFRM0

K070